


Amino Nova Button Layout

- 1 Power on/off button
- 2 TV input select button
- 3 Setup button for Nova
- 4 Device control buttons for TV, STB, DVD, or AUX (if programmed)
- 5 Pause & forward/rewind buttons for Live TV, DVR or VOD
- 6 Record start/stop button
- 7 Option button for on-screen menus
- 8 Back button
- 9 Program information button
- 10 On-screen menu button
- 11 Navigation and OK buttons
- 12 VOD button
- 13 Exit on-screen menu button (back to Live TV)
- 14 Electronic program guide button
- 15 Colour buttons
- 16 Previous channel select button
- 17 Previous channel select button
- 18 Channel up/down buttons or page up/down when in guide
- 19 Mute button
- 20 Channel/text entry buttons
- 21 Closed captions on/off button
- 22 Media button
- 23 Insert button for a full stop (period) or for displaying on-screen keyboard
- 24 DVR button
- 25 Live TV button

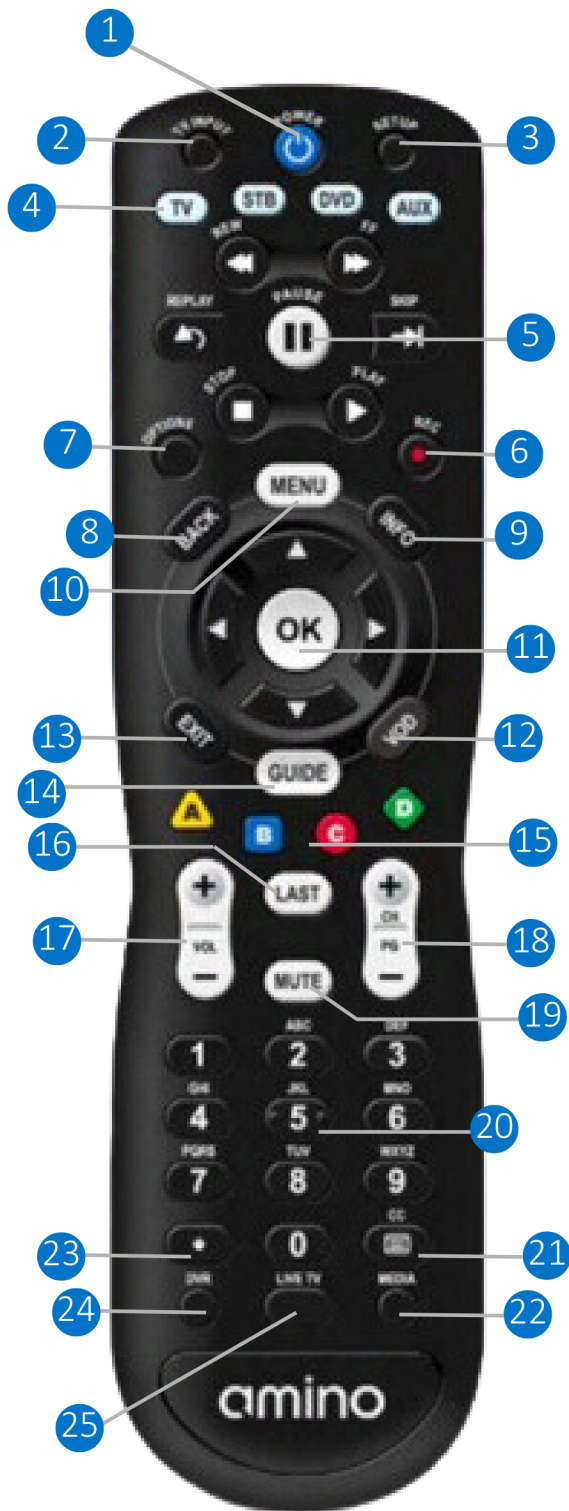

Amino Nova Remote

General Information

Batteries

- Use 2x AA batteries.
- Do not mix types or new & old batteries.
- Do not use rechargeable batteries.
- Remove batteries if you're not expecting to use remote for several weeks.
- Immediately remove any leaking batteries. Leaking batteries can cause burns to skin or eyes. Handle with care.
- Dispose of batteries responsibly.

Connecting Your Remote to Other Devices

Setup: Brand Search

- Identify the brand of the device you are trying to connect, then visit (www.amino.tv/resources) and note the 5-digit brand code that matches the brand of your device.
- With your device turned on, press the "Device control" button for the device you want to control, for example if you want to control a DVD player, press "DVD".
- Press and hold the "Setup" button until the "Device control" button flashes twice.
- Enter the 5-digit code for your device. On each digit entry the "Device control" button will flash. If you make an error, the LED will give a single long flash.
- Press the "Power on" button. If your device turns off then setup is complete.
- If your device does not turn off, repeat the setup procedure using another code (if listed) for the device. You may need to try several codes.

If you change your device to a different brand and the remote control requires re-programming, repeat this brand search procedure with your new device

If your device is not listed, or you have tried all the codes listed for it and it still does not respond to the remote control, your device may still be supported and you should try the Auto Search method.



Amino Nova Remote

Connecting Your Remote to Other Devices

Setup: Auto Search

- With your device turned on, press the "Device control" button on your remote for your device.
- Press and hold the "Setup" button until the "Device control" button flashes twice.
- Press the number buttons "9, 9, 1" then press the "Power" button.
- Press the "Channel +" button repeatedly until your device turns off.
- Press and hold the "Setup" button until the "Device control" button flashes twice. The brand code is now saved.

Setup: Punch Through

When configured to control a selected device, the remote buttons will operate that device. However, specific buttons can be sent to another device by using the 'punch through' feature. For example, you may want to send the volume up and down button to an AUX device rather than to your TV set.

- Press and hold the "Setup" button until the "Device control" button flashes twice.
- Press the number buttons "9, 7, 8".
- Press the "Device control" button for the device you want to control (ex. if you want to control a DVD player, press "DVD").
- Press the keys you want to punch through (ex. Volume up and down, Mute, etc...).
- Press the "Device control" button for the device you want to target (ex. "SB", "DVD").
- Press and hold the "Setup" button until the "Device control" button flashes twice. Punch through setup is now complete. If you make an error, the LED will give a single long flash.

Resetting the Remote

Resetting Brand Search and Auto Search

- Press and hold the "Setup" button until the "Device control" button flashes twice.
- Press the number buttons "9, 7, 7".
- Press and hold the "Setup" button until the "Device control" button flashes twice.

Resetting Brand Search and Auto Search

- Press and hold the "Setup" button until the "Device control" button flashes twice.
- Press the number buttons "9, 7, 8".
- Press and hold the "Setup" button until the "Device control" button flashes twice.

If you make an error for either, the LED will give a single long flash.

Amino Nova Remote

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- this device may cause harmful interference, and
- this device must accept any interference received, including interference that may cause undesired operation of the device.

IMPORTANT NOTE:

RF exposure warning statement:

- This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
- This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.